


# QUICK STARTUP

## DUAL AIR BED MATTRESS ASSEMBLY

### Ultra & Adjust-A-Rest Digital Comfort Sleep Systems

#### FOR THE BEST REST OF YOUR LIFE

- Carefully remove Air Bed components from cartons. Avoid use of knives and box cutters. Bed is assembled from bottom up.
  - If using foundation, setup foundation on metal frame or bed legs
  - Unzip the Bottom & Sides Dish from Top Cover (note: some Top Covers have another zipper just under top panel to access reversable insert), and place on Foundation or Platform Bed Deck and insert Interlocking Bolsters. Insert Top to Bottom Foam Rail A Bolsters first. Port Holes in Head to Foot Bolsters should be positioned at head of bed for threading Air Hoses to Pump. Side to Side Bolsters B are then inserted to form a rectangular foam sided dish. If upside down or not completely unfolded Bolsters will not reach head to foot or side to side. Bolsters may bow until Air Chamber(s) are filled.
  - Lay unfolded Air Chambers inside the dish with the Air Hoses positioned on bottom then thread Hoses straight through Port Holes at bottom of Bolster sling panels at head of bed and then through Port Holes at bottom of Top Enclosure at head of bed. Do not pull hoses forcefully and make sure there are no kinks.
  - Place the Pump directly under the hoses at the head of the bed and connect Air Hoses to corresponding nozzles on the Air Pump by pushing Cam-Lock onto Pump Connector and turn swivel collar clockwise to lock & counter clockwise to unlock. You will feel Cam-Lock click into place once locked. Optional single Chamber models utilize only one Controller and Cam-Lock connector which is then only attached to one of the Pump air outlet Connectors.
- Note: Optional single Chamber models utilize only one Control and Cam-Lock connector which is then only attached to one of the Pump air outlet Connectors.
- Plug pump into surge protector and then into power supply, locate the hand controls and inflate the air cores one at a time. Only one side of Dual systems may be inflated or deflated at a time. Fill the Air Chambers until  $\frac{3}{4}$  inflated. Insert the Anatomic Insert Layer evenly over top of Air Chambers, tuck F/R Flange behind zipper on Bottom Dish, zip Top Enclosure closed then fill Air Chambers.
- Notes: a) Some smooth top models do not include Anatomic Insert Layer.  
b) For models with exterior F/R Flange, fold over zipper to cover.
- Slide Air Pump and Air Bed into final position, adjust to preferred comfort and enjoy the ultimate adjustable sleep.

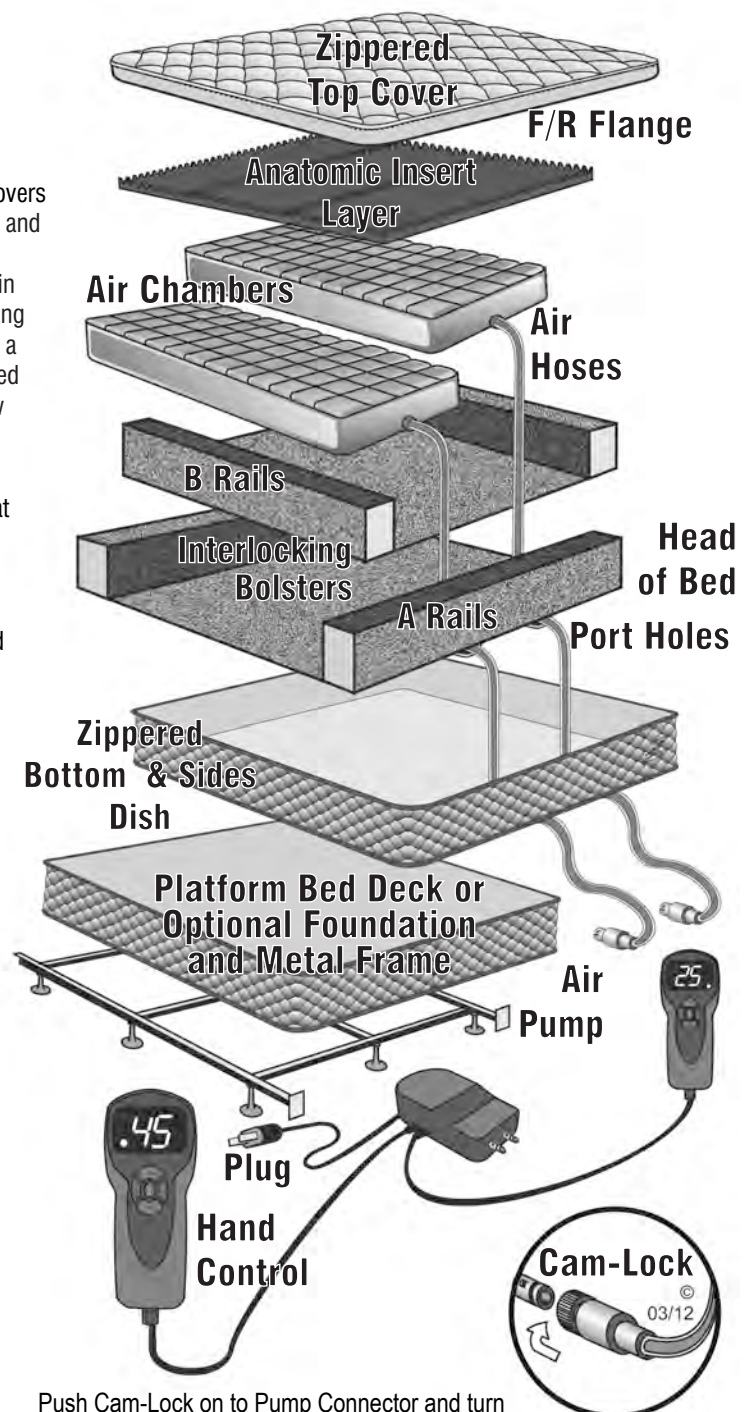

Push Cam-Lock on to Pump Connector and turn swivel collar clockwise to lock & counter clockwise to unlock. You will feel Cam-Lock click into place once locked.

**Specialty Sleep Services**  
**530 W. Elk Pl. Denver, CO 80216**  
**720-241-0648**