- **ENGLISH**
- SPANISH
- FRENCH





CONTENTS

Advisory	3
Acoustics	
Fabric Cleaning Information	5
nstallation	6
Power Down Operation	. 13
Remote Control Function	. 14
Remote Control Programming	. 15
Froubleshooting	. 17
1-3-25 Warranty	. 18

Spanish translation begins on page 20. La traducción en español inicia en la página 20.

French Canadian translation begins on page 38. La traduction en Français débute à la page 38.



If adjustable base does not operate or if parts are missing, call: 800-888-3078

Do not contact retail store or dealer.

IMPORTANT INFORMATION

READ THE FOLLOWING INFORMATION CAREFULLY BEFORE USING THIS PRODUCT



FOR OPTIMUM ADJUSTABLE BASE
OPERATION, USE A GROUNDED, ELECTRICAL
SURGE PROTECTION DEVICE (NOT
INCLUDED). FAILURE TO USE A SURGE
PROTECTION DEVICE COULD COMPROMISE
SAFETY OR CAUSE PRODUCT MALFUNCTION.

ELECTRICAL RATING

Electrical components are rated for 110/120 voltage, 60Hz, 100 watt.

ELECTRICAL GROUNDING

This product is equipped with a polarized or grounded electrical power cord. The power cord will only fit into a grounded, electrical surge protection device (not included) or a grounded electrical outlet.

WARRANTY WARNING

Do not open any control boxes, motors or remote control devices (with the exception of the remote control and power down box battery compartments). The product warranty will be void if these components are tampered with. Do not attempt to alter component wiring or adjust or modify the structure of the product in any way or the warranty will be void. Any repair or replacement of base parts must be performed by authorized personnel.

LUBRICATION

This product is designed to be maintenance free. The lift motors are permanently lubricated and sealed—no additional lubrication is required. Do not apply lubricant to lift motor lead screws or any nylon nuts or the base may inadvertently creep downward from the elevated position.

PRODUCT RATINGS

The base lift motors are *not* designed for continuous use. Reliable operation and full life expectancy will be realized as long as lift motor operation does not exceed five (5) minutes over a thirty (30) minute period, or approximately 15% duty cycle. *Note: Massage equipped bases are not designed for continuous, extended massage operation. Massage systems are rated for a maximum of 2 hours of use within any 6 hour period.* Any attempt to circumvent or exceed product ratings will shorten the life expectancy of the product and may void the warranty.

The recommended maximum weight (including mattress) is 550 lb (249 kg) distributed evenly across the base. This product is not designed to support or lift this amount in the head or foot sections alone. *Note: Exceeding the recommended weight restrictions could damage the base and void the warranty.*

For best performance, consumers should enter and exit the adjustable base with the base in the flat (horizontal) position. Avoid placing entire weight on head or foot section of the base, including when in the raised position. **DO NOT STAND ON BASE AT ANY TIME.**

UL (Underwriters Laboratories) recognized components.

CFR 1633 approved for use with most mattresses. Assembled in USA.

ADVISORY

IMPORTANT INFORMATION

READ THE FOLLOWING INFORMATION CAREFULLY BEFORE USING THIS PRODUCT

SMALL CHILDREN / PETS WARNING

After the base is unboxed, immediately dispose of packaging material as it can smother small children and pets. To avoid injury, children or pets should not be allowed to play under or on the base. Children should not operate this base without adult supervision.

PACEMAKER WARNING

This product produces a vibrating sensation. It is possible that individuals with heart-assist pacemakers may experience a sensation similar to exercise. Consult physician for complete information.

HOSPITAL USE DISCLAIMER

This base is designed for in-home use only. It is not approved for hospital use and does not comply with hospital standards. Do not use this base with tent type oxygen therapy equipment, or use near explosive gases.

SERVICE REQUIREMENTS

Service technicians are not responsible for moving furniture, removing headboards and footboards or any items required to perform maintenance on the base. In the event the technician is unable to perform service due to lack of accessibility, the service call will be billed to the purchaser and the service will have to be rescheduled.

FCC COMPLIANCE

The equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC rules. Operation is subject to the following conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Radio Frequency = 2.4GHz.

ACOUSTICS

LIFTING/LOWERING MECHANISMS

The lift/lower feature will emit a minimal humming sound during operation. This is normal.

During operation, the lift arm wheels make contact with the platform support of the base. This applies slight tension on the moving components and resonance is reduced to a minimum level. If excessive noise or vibration is experienced, reverse the movement action (up or down) of the base with the remote control. This should realign the base's activating mechanisms to the proper operational position.

MASSAGE OPERATION

The massage feature will emit a minimal tone during operation. This is normal. When the massage level is increased, motor resonance will intensify accordingly.

LOCATION ENVIRONMENT

The level of sound experienced during operation is directly related to the location environment. For example, when a base is located on a hardwood floor with the massage feature in operation, a vibrating tone will be audible. To minimize this resonance, place a piece of carpet, or rubber caster cups, under each leg or caster of the base.

It is possible to experience vibration or noise from the headboard brackets, headboards or footboards if mounting bolts are not firmly tightened.

FABRIC CLEANING INFORMATION

Spot clean only with water based shampoo or foam upholstery cleaner. Pretest a small, inconspicuous area before proceeding. Do not over wet. Do not use solvents to spot clean. Pile fabrics may require brushing with a non-metallic, stiff bristle brush to restore appearance. *Hot water extraction or steam cleaning is not a recommended cleaning method.*

To prevent overall soiling, frequent vacuuming or light brushing with a non-metallic stiff bristle brush to remove dust and grime is recommended. When cleaning a spill, blot immediately to remove spilled material. Clean spots or stains from the outside to the middle of the affected area to prevent circling. Use a professional furniture cleaning service when an overall soiled condition is apparent.

For installation and setup, complete the following procedures, in the order indicated below and on the following pages:

STEP 1

Before discarding any packing materials, check the adjustable base shipping carton and verify the following items are included:

- (2) Corner Mattress Retainers w/ bushings (per base)
- (4) Legs
- (2) Headboard Bracket Assemblies
- (1) Headboard Bracket Hardware Kit (blister card)
- (1) Remote Control w/ (3) AAA batteries
- (1) Power Down Box
- (1) Dual Sync Cable (TXL bases only)
- (1) Warranty Activation Card
- (1) Quick Setup Guide



QUICK SETUP GUIDE



WARRANTY **ACTIVATION CARD**



CORNER MATTRESS RETAINER (2 per base)



POWER DOWN BOX (factory pre-installed to motor)



DUAL SYNC CABLE (TXL bases only)





w/ 3 AAA batteries




HEADBOARD BRACKET ASSEMBLIES - HARDWARE (4 bracket pieces, hardware blister card)

STEP 2

Remove the hardware box.

STEP 3

Install (4) legs into the base frame. Simply screw each leg into a tapped hole at the corner of the base frame (**FIGURE 1**).

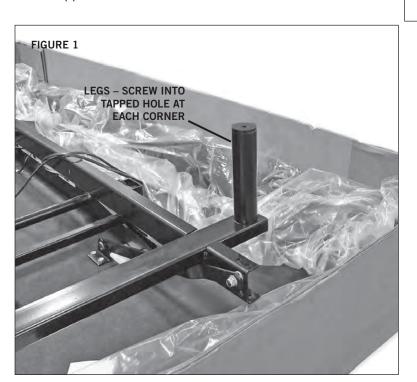

MARNING

AT LEAST TWO PEOPLE ARE RECOMMENDED FOR HANDLING AND MOVING ADJUSTABLE BASE.



DO NOT ATTEMPT TO SCREW LEGS INTO ANY OTHER INSERTS. THIS WILL DAMAGE PRODUCT.

STEP 4

Carefully lift the adjustable base with plastic packaging (to prevent base from becoming soiled) from the shipping carton, keeping the unit top-side-down. Remove and extend out power cord from base.




POWER CORDS MUST NOT INTERFERE WITH ANY ADJUSTABLE BASE MECHANISMS.

STEP 5

Plug electrical power cord into a working, grounded electrical outlet. **Note:** An electrical surge protection device is recommended (not included).

STEP 6

Install batteries in remote control (3-AAA, included) (**FIGURE 2**). **Note: Make sure batteries are properly oriented.** Briefly activate all functions of the base with the remote control to verify all features are in working order. If base does not operate, refer to the *Troubleshooting* section of this manual.

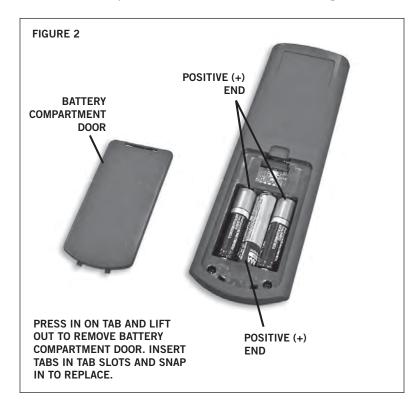

STEP 7

Return base to the level position.


STEP 8


Remove the plastic packaging from the base frame. Carefully rotate the adjustable base over to position the base so it is resting on its legs.

STEP 9

Install corner mattress retainers at the foot end of the adjustable base as follows:

- a. Locate by feel corner holes underneath base cover at foot end of base (**FIGURE 3**).
- b. Insert two-pronged bushing into holes in corner mattress retainer. Press bushing through material into holes until retainer fits securely against base (**FIGURE 4**).

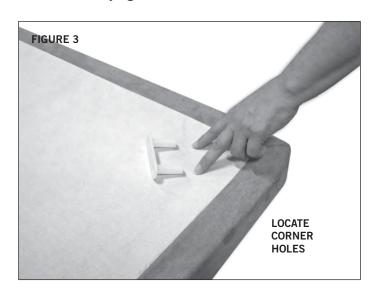

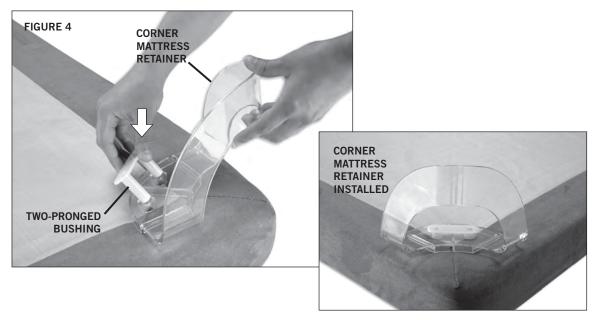

NOTE: If base is to be set up without a headboard, basic installation is now complete. If headboard is to be installed, proceed to Headboard Bracket Installation.

HEADBOARD BRACKET INSTALLATION




FAILURE TO FOLLOW HEADBOARD BRACKET INSTALLATION INSTRUCTIONS MAY CAUSE HEADBOARD BRACKET INTERFERENCE WITH BASE FOAM DURING BED OPERATION.

BASE FOAM OR BASE COVER DAMAGE COULD RESULT.

MARNING


IN ORDER TO AVOID A PERSON OR PET BEING CAUGHT IN THE SPACE REFERENCED BELOW WHILE THE BASE IS IN MOTION, THE BOTTOM OF THE HEADBOARD CROSS MEMBER MUST BE POSITIONED SO THAT THERE IS NO MORE THAN 3 INCHES (76.2mm) BETWEEN THE HEADBOARD AND THE TOP OF THE MATTRESS (FIGURE 5). DO NOT EXCEED 3 INCHES (76.2mm). FAILURE TO FOLLOW THIS INSTRUCTION COULD RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

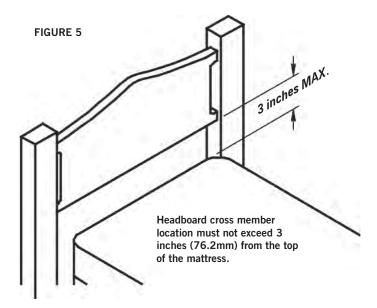


STEP 10

Install headboard brackets to the adjustable base frame as follows:

- a. Using the remote control, raise the head section of the base as far as it will articulate to gain access to the adjustable base frame.
- b. Slide one headboard bracket channel onto one side of the base frame. Using (2) carriage bolts/nuts attach channel to base frame (FIGURE 6). Hand tighten bolts/nuts (loosely) to allow adjustment of the headboard bracket channels. Repeat procedure to install the other headboard bracket channel to the other side.

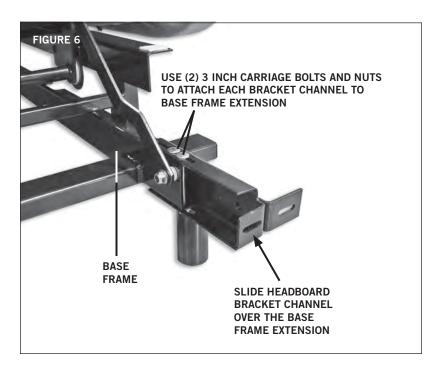

- c. Attach one headboard bracket flange to one of the bracket channels with (2) hex head bolts/nuts (**FIGURE 7**). Tighten bolts. Repeat procedure to attach the other headboard bracket flange.
- d. Slide headboard bracket assemblies (in or out) to achieve a distance of 1.5 inches (38.1mm) to 2 inches (50.8mm) between the edge of the base and headboard bracket flange assemblies (**FIGURE 7**).
- e. Firmly tighten the 3 inch carriage bolts of both headboard bracket channels.
- f. Measure the distance (center-to-center) between the mounting holes in the headboard.
- g. Measure the center-to-center distance between the mounting slots of the headboard bracket flanges.
- h. If bracket flange adjustment is required to accept the headboard, remove the 1 inch headboard bracket flange bolts and move flanges side-to-side for the adjustment (**FIGURE 7**). Reinstall bolts and tighten.
- i. Install headboard.

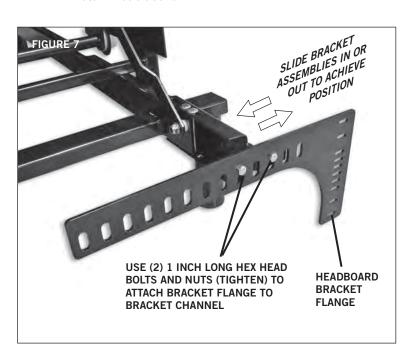

NOTE

TWIN SIZE HEADBOARD BRACKET ASSEMBLIES ARE SHOWN (FIGURE 7). QUEEN SIZE HEADBOARD BRACKETS ARE EQUIPPED WITH ANGLE BRACES.


STEP 11 Install mattress on adjustable base.

Typical Style collection[™] adjustable base installation is now complete.

POWER DOWN OPERATION

To lower the base to the *flat* position during an electrical power outage, complete the following procedure:

STEP 1Locate (1) power down box (**FIGURE 8**). Install (2) 9 volt batteries (not included) in power down box (**FIGURE 8**).

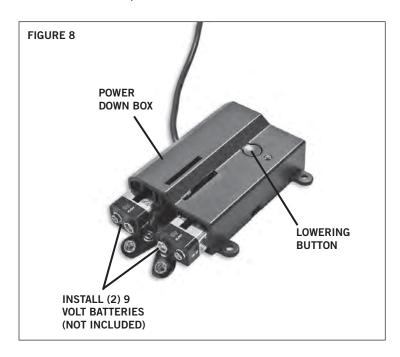

STEP 2

Press the lowering button on the power down box (**FIGURE 8**) to lower the base to the flat position.

STEP 3

Remove two (2) 9 volt batteries from power down box. When power is restored from outage, base is ready to resume normal operation.

REMOTE CONTROL FUNCTION

SET BUTTON

Use to program *z grav*, *tv*, and *cust* presets.

UNDERBED LIGHT BUTTON

Press to turn on/off underbed light feature.

HEAD UP/DOWN BUTTONS

Press and hold to raise or lower the head section.

FLAT BUTTON

Press to adjust the base to the level position.

ZERO GRAVITY BUTTON

Press to adjust the base to the preprogrammed reclined position for optimum weight distribution allowing total comfort and relaxation. This position is reprogrammable using the *set button*. To reprogram, adjust base to desired position, press and hold the *set button* until the massage motors turn on and off, then press and hold the *z grav button* until the massage motors turn on and off.

HEAD MASSAGE INTENSITY BUTTONS

Press to increase/decrease massage intensity. Massage has 3 speeds: Low, medium and high. Massage will automatically shut off after 15 minutes.

WAVE BUTTON

After the head and/or foot massager/s have been activated and the desired intensity has been achieved, press to turn the wave on. Press to increase wave speed. Note: When active, wave intensity indicator (shown here) will light up.





FLAT

TV

WAVE

MASSAGE

CUST

N

FOO

HEAD

ZGRAV

HEAD

TORCH BUTTON

Press and hold to use the flashlight feature.

LOCK BUTTON

To lock / unlock the remote control buttons, press and hold *lock button* for 5 seconds. Backlight will flash 3 times.

FOOT UP/DOWN BUTTONS

Press and hold to raise or lower the foot section.

CUSTOM BUTTON

To program a position, adjust base to desired position, press and hold the *set button* until the massage motors turn on and off, then press and hold the *cust button* until the massage motors turn on and off.

TV POSITION BUTTON

Press to adjust the base to the preprogrammed TV viewing position to maximize comfort and entertainment. This position is reprogrammable using the *set button*. To reprogram, adjust base to desired position, press and hold the *set button* until the massage motors turn on and off, then press and hold the *tv position button* until the massage motors turn on and off.

FOOT MASSAGE INTENSITY BUTTONS

Press to increase/decrease massage intensity. Massage has 3 speeds: Low, medium and high. Massage will automatically shut off after 15 minutes.

MASSAGE ON/OFF BUTTON

Press to turn massage motors on or off.



REMOTE CONTROL REQUIRES THREE (3) AAA SIZE BATTERIES. TO CONSERVE BATTERY LIFE, THE TRANSMITTER TURNS OFF ALL FUNCTIONS WHEN ANY BUTTON IS PRESSED FOR MORE THAN 50 SECONDS.

PRESS & HOLD TO ONE TOUCH

To change remote control functions from "press and hold" to "one touch" ("one touch" = press and release), simultaneously press the **HEAD MASSAGE DOWN** and **FOOT MASSAGE DOWN** buttons for 5 seconds. The massage motor will turn on and off confirming the change. Your base is now set to "one touch."

When in "one touch" mode:

Zero Gravity, Custom, and TV Position buttons

Press and release (one touch) button. Base will adjust to the programmed position. Press any other button to stop the base during movement.

Flat button

Press and release (one touch) button. Base will shut off massage motor, if active, and adjust base to level position. Press any other button to stop the base during movement.

To revert back to **factory settings**, simultaneously press and hold the **SET** button and the **FLAT** button for 5 seconds. The massage motor will turn on and off confirming the change. Your base is now set to factory settings. *Note: Zero Gravity and TV Positions will revert to factory preprogrammed positions.*

REMOTE CONTROL PROGRAMMING (1 remote control - 1 base)

Program One Remote to Operate One Base - perform the following numbered procedure.

STEP 1 Remove the battery compartment door from the remote control (FIGURE 9).




STEP 2

Make sure adjustable base is plugged into electrical power source. Position base on its side. Locate the power down device (**FIGURE 10**).

STEP 3

Push the power down reset button *in* two times in rapid succession (**FIGURE 10**). The underbed lighting will come on.





STEP 4

On the remote control, press and hold the *learn switch* (**FIGURE 9**) until the underbed lighting goes off.

STEP 5

Operate remote control to verify programming.

One remote control is now programmed to operate one base.

REMOTE CONTROL PROGRAMMING (1 remote control - 2 bases)

Program One Remote to Operate Two Bases (Tandem Syncing) - perform the following numbered procedure.

Note: Make sure both remotes are in "press & hold" mode and both bases are flat before beginning procedure.

STEP 1

Unplug both bases from electrical power source.

STEP 2


Choose base 1 remote control. Retain base 2 remote as a spare.


STEP 3

Operate remote control to verify programming. NOTE: Remote control is factory programmed to operate one base. If reprogramming is required, refer to Remote Control Programming - 1 remote control to 1 base.

STEP 4

Locate dual sync cable (FIGURE 11).





STEP 5

Position both bases on their sides. On base 1, unplug the splitter cable from the MFP port of motor. Insert one male plug of dual sync cable into the MFP port of motor and female plug into splitter cable (**FIGURE 12**).

STEP 6

Repeat Step 5 with base 2, using the remaining male and female plugs of the dual sync cable.

STEP 7


Turn both bases over so they are resting on their legs. CAUTION: MAKE SURE CABLE IS CLEAR OF BASE AND FREE OF ANY PINCH POINTS.

STEP 8

Plug both bases into electrical power source.

STEP 9

Operate both bases with the remote control. **NOTE:** If bases do not operate in unison with the remote, verify dual sync cable connections are fully seated in both MFP ports. Unplug both bases, wait 10 seconds, then plug them back in.

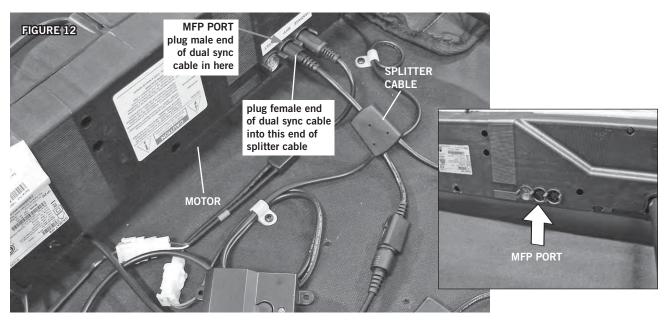

TROUBLESHOOTING

If adjustable base fails to operate, investigate the symptoms and possible solutions provided in the chart below:

SYMPTOM	SOLUTION
Remote control illuminates and appears to be operable, but will not activate base.	 Verify power cord is plugged into a working, grounded electrical outlet. A grounded, electrical surge protection device is recommended. Test outlet by plugging in another working appliance.
No features of the base will activate.	Program the remote control (see <i>Remote Control Programming</i> section of this manual for programming procedures).
	 Unplug power cord, wait 30 seconds and plug in to reset electronic components.
	Electrical circuit breaker may be tripped. Check electrical service breaker box to verify.
	Defective surge protection device or electrical outlet. Test outlet by plugging in another working appliance.
Remote control will not illuminate.	Replace batteries in the remote control.
Head or foot section will elevate, but will not return to the horizontal (flat) position.	Base mechanism may be obstructed. Elevate base and check for obstruction. Remove obstruction.
	Head section may be too close to the wall.
	Headboard may be too close the edge of the mattress. Verify a 1.5" (38.1mm) to 2" (50.8mm) distance between headboard brackets and mattress. Adjust if required.
Excessive massage motor noise.	Verify headboard brackets were removed during installation. Remove headboard brackets if still attached to the underneath side of base.
	If base is located on hard surface flooring, place carpet pieces or rubber caster cups under each leg or caster of the base.
	Elevate the head or foot section a short distance (with the remote control) to realign the lift/lower mechanisms with the base support platform.
	 Verify that the base is not positioned against a wall, nightstand, or other object that may cause vibration or noise.
	If base is installed over a base frame, verify massage motors are not causing base frame (or base frame components) to vibrate.
	Verify that headboard attachment hardware is tightened firmly (if used).

1 YEAR, 3 YEAR AND 25 YEAR LIMITED WARRANTY

In this warranty: "Adjustable base" means the adjustable bed foundation sold by L&P to the dealer. The "adjustable base" does not include the mattress. "L&P" means Leggett & Platt, Incorporated. "Purchaser" and "You" both mean the consumer who is the original purchaser of this adjustable base made by L&P. This warranty is not transferrable. "Warranty Commencement Date" means either (i) the date You purchased a new and unused L&P adjustable base or (ii) the date of manufacture of this adjustable base if You purchased an L&P adjustable base that has been used as floor or display model. L&P warrants this adjustable base to You on the terms and over the reducing periods of time set out below. All warranty claims require notice from You to be given to L&P in the manner set out below, and to be received by L&P inside the applicable warranty time period.

1ST YEAR FULL WARRANTY

For the first year from the Warranty Commencement Date, your adjustable base is warranted against non-excluded defects in L&P's workmanship or materials. During the first year from the Warranty Commencement Date, L&P will repair or replace (at no cost to You) any defective adjustable base part, and L&P will pay all authorized labor and transportation costs associated with the repair or replacement of any parts found to be defective.

2ND & 3RD YEAR LIMITED WARRANTY

During the second and third year from the Warranty Commencement Date, L&P will replace any adjustable base part found to be defective and not excluded by this warranty. You are responsible to pay all service and transportation costs related to the costs of receiving and installation of the new part.

4TH YEAR TO END OF 25TH YEAR LIMITED WARRANTY

Starting in the fourth year from the Warranty Commencement Date and through to the end of the 25th year from the Warranty Commencement Date, L&P will replace steel and mechanical base parts found to be defective and not excluded by this warranty. This warranty does not cover any electronics, electrical components, drive motors or massage motors. You are responsible to pay all service and transportation costs related to receiving and installation of the new part and a portion of the cost of the replacement steel and mechanical part, based on the number of months that the base has been owned by you since the fourth anniversary of the Warranty Commencement Date. By the end of the 25th year, no portion of the replacement cost is covered by L&P. You will be required to pay 1/22nd of the then current replacement cost of the part multiplied by the number of years past the third year from the Warranty Commencement Date. This portion is calculated using the following formula: Cost of the part divided by 22 [being the number of years in years 4 to 25 inclusive], multiplied by the number of years you have owned the base since the end of the first 3 years. For example, if you make a claim for a part eligible for this warranty in the 5th year since the Warranty Commencement Date, you would be responsible for paying: \$100 part cost divided by 22, multiplied by 2 = \$9.09.

ADDITIONAL TERMS AND CONDITIONS

This warranty requires notice to be given to L&P of any claim for repairs or replacement parts.

EXCLUSIONS:

This warranty does not apply; (a) to any damage caused by You; (b) if there has been any repair or replacement of adjustable base parts by an unauthorized person; (c) if the adjustable base has been mishandled (whether in transit or by other means), subjected to physical or electrical abuse or misuse, or otherwise operated in any manner inconsistent with the operation and maintenance procedures outlined in the Owner's Manual and this warranty; (d) to damage to mattresses, fabric, cables, electrical cords or items supplied by dealers (contact the dealer for warranty information on these items); (e) if there has been any modification of the adjustable base without prior written consent by L&P; or (f) to costs for unnecessary service calls, including costs for in-home service calls solely for the purpose of educating You about the adjustable base or finding a satisfactory power connection.

This warranty will be void if either the recommended weight restriction is not followed (refer to the advisory section of the Owner's Manual) or if You sell or give or transfer the base to another person.

Any repairs to or replacement to Your adjustable base or its components under the terms of this limited warranty does not extend the applicable warranty from the Warranty Commencement Date. This time limitation may not apply in some jurisdictions, including the Province of Quebec.

The decision to repair or to replace defective parts under this warranty shall be made, or cause to be made, by L&P at its option and in its sole discretion.

Continued on next page...

1 YEAR, 3 YEAR AND 25 YEAR LIMITED WARRANTY

Repair or replacement shall be the sole remedy of the Purchaser. There shall be no liability on the part of L&P for any special, indirect, incidental, or consequential damages or for any other damage, claim, or loss not expressly covered by the terms of this warranty.

This limited warranty does not include reimbursement for inconvenience, removal, installation, setup time, loss of use, shipping, or any other costs or expenses. L&P and its service technicians will not be responsible for moving furniture or any other items not attached to the adjustable base in order to perform service on the adjustable base.

It is the sole responsibility of You to provide adequate space and accessibility to the adjustable base. In the event that the technician is unable to perform service due to lack of accessibility, the service call will be billed to You and the service will have to be rescheduled.

L&P makes no other warranty whatever, express or implied, and all implied warranties of merchantability and fitness for a particular purpose are disclaimed by L&P and excluded from this agreement.

Some American States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to You.

This warranty gives You specific legal rights, and You may also have other rights, which may vary from jurisdiction to jurisdiction. This warranty is valid in all 50 American States, the District of Columbia, Puerto Rico, and all 10 Provinces and 3 Territories of Canada.

For customer service under this limited warranty, give notice to L&P by mail, phone, email or online to the addresses set out below:

Leggett & Platt, Incorporated PO Box 668 Lexington, North Carolina 27293

toll free phone: 1.800.888.3078 online: lpadjustablebases.com

PLEASE DO NOT CONTACT YOUR RETAIL DEALER
OR ANY OTHER SERVICE PERSONNEL